
Revisions			
REV:	Description	Date	Approval
A.0			

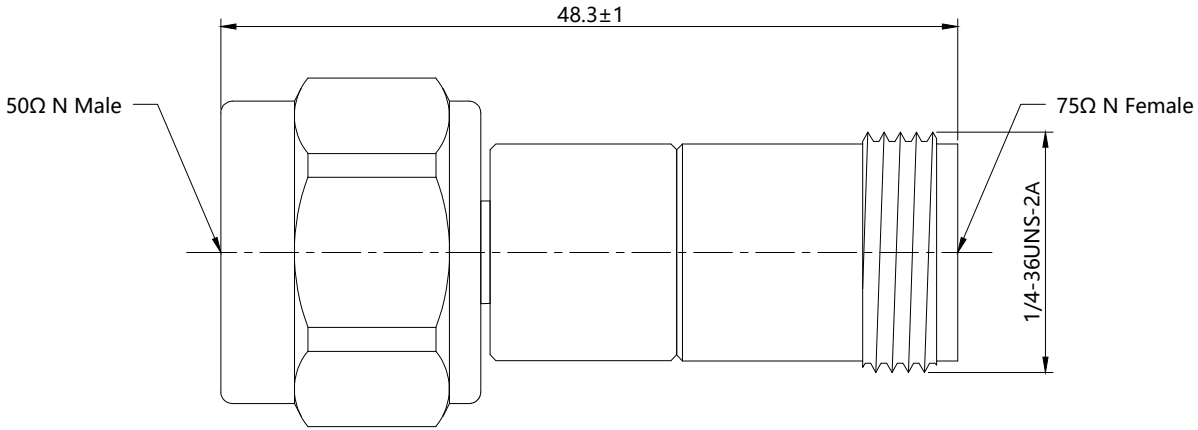

Electrical parameters:
1.Impedance: 50Ω
2.Frequency: DC~6GHz
3.VSWR: ≤1.30
4.Attenuation: 5.7+0.5dB
5.Input Power: 2Watts Avg @ +25℃
6.Temperature Range: -40~+125℃
7.Durability: 500 Cycle Min.
8.All materials are RoHS compliance

No.	Description	Material	Plating
N	Center conductor	Beryllium Copper	Gold
	Insulator	PTFE	NA
	Housings	Stainless steel	Passivated
	Body	Stainless steel	Passivated

General tolerance Unless Otherwise Specified		0 Places;±0.2	4 Places;±0.2
		1 Places;±0.2	Angles;
		2 Places;±0.2	Product:
		3 Places;±0.2	

Maker	Wes	Date	2023/04/25	Shenzhen Vinstronics Electronic Co., Ltd	
Review		Date		Drawing Number	VST-IT-50NM75NF-01
Approved		Date		Description	50Ω N Male to 75Ω N Female DC~6GHz,5.7dB
	Scale:1:5:1	Unit:	mm	RVE	A.0	Page	1 OF 1