
Revisions			
REV:	Description	Date	Approval
A.0			

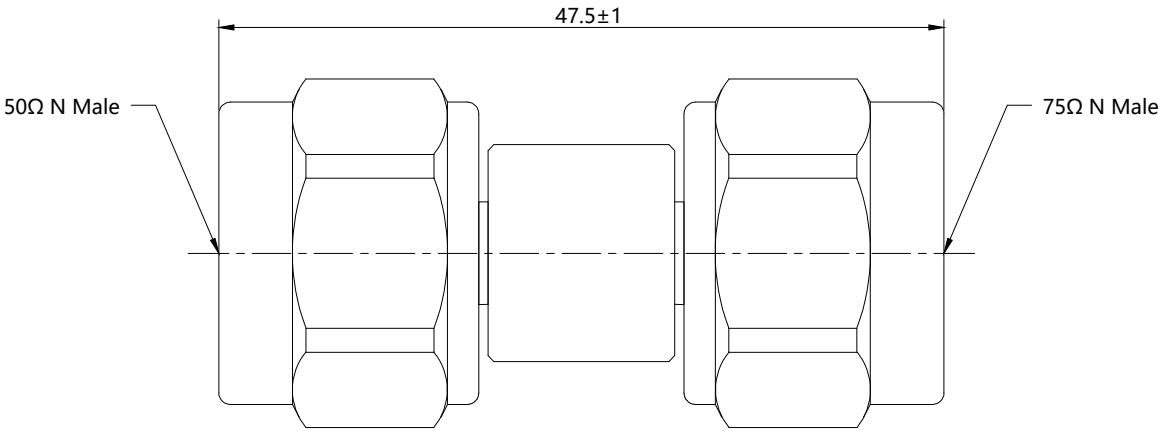

Electrical parameters:
1.Impedance: 50Ω
2.Frequency: DC~6GHz
3.VSWR: ≤1.30
4.Attenuation: 5.7+0.5dB
5.Input Power: 2Watts Avg @ +25℃
6.Temperature Range: -40~+125℃
7.Durability: 500 Cycle Min.
8.All materials are RoHS compliance

No.	Description	Material	Plating
N	Center conductor	Beryllium Copper	Gold
	Insulator	PTFE	NA
	Housings	Stainless steel	Passivated
	Body	Stainless steel	Passivated

General tolerance Unless Otherwise Specified			
0 Places;±0.2	4 Places;±0.2		
1 Places;±0.2	Angles;		
2 Places;±0.2	Product:		
3 Places;±0.2			

Maker	Wes	Date	2023/04/25	Scale:1:5:1	Unit: mm
Review		Date			
Approved		Date			

Shenzhen Vinstronics Electronic Co., Ltd					
Drawing Number	**VST-IT-50NM75NM-01**				
Description	50Ω N Male to 75Ω N Male DC~6GHz,5.7dB				
RVE	A.0	Page	1 OF 1		