
Revisions			
REV:	Description	Date	Approval
A.0			

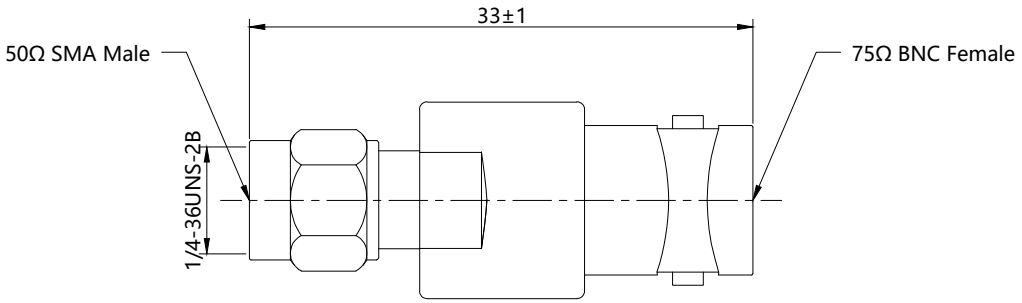

Electrical parameters:
1.Impedance: 50Ω
2.Frequency: DC~3GHz
3.VSWR: ≤1.25
4.Attenuation: 5.7+0.5dB
5.Input Power: 2Watts Avg @ +25℃
6.Temperature Range: -40~+125℃
7.Durability: 500 Cycle Min.
8.All materials are RoHS compliance

No.	Description	Material	Plating
SMA	Center conductor	Beryllium Copper	Gold
	Insulator	PTFE	NA
	Housings	Stainless steel	Passivated
	Body	Stainless steel	Passivated
BNC	Center conductor	Beryllium Copper	Gold
	Insulator	PTFE	NA
	Housings	Stainless steel	Passivated
	Body	Brass	Nickel

General tolerance Unless Otherwise Specified		0 Places;±0.2	4 Places;±0.2	**Shenzhen Vinstronics Electronic Co., Ltd**	
		1 Places;±0.2	Angles;		
		2 Places;±0.2	Product:		
		3 Places;±0.2			
Maker	Wes	Date	2023/04/25	Drawing Number	VST-IT-75BNCF50SM-01
Review		Date		Description	75Ω BNC Female to 50Ω SMA Male DC~3GHz,5.7dB
Approved		Date			
	Scale:1:5:1	Unit:	mm	RVE	A.0	Page	1 OF 1