
Revisions			
REV:	Description	Date	Approval
A.0			

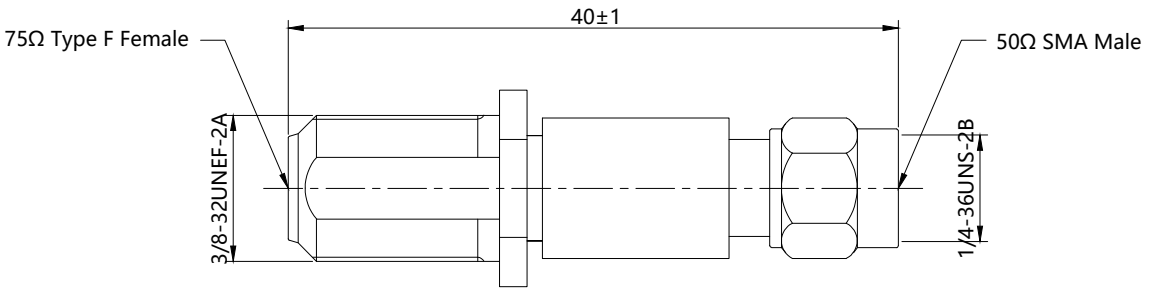

Electrical parameters:
1.Impedance: 50Ω
2.Frequency: DC~3GHz
3.VSWR: ≤1.25
4.Attenuation: 5.7+0.5dB
5.Input Power: 2Watts Avg @ +25℃
6.Temperature Range: -40~+125℃
7.Durability: 500 Cycle Min.
8.All materials are RoHS compliance

No.	Description	Material	Plating
SMA	Center conductor	Beryllium Copper	Gold
	Insulator	PTFE	NA
	Housings	Stainless steel	Passivated
	Body	Stainless steel	Passivated
F	Center conductor	Beryllium Copper	Gold
	Insulator	PTFE	NA
	Housings	Stainless steel	Passivated
	Body	Brass	Nickel

General tolerance Unless Otherwise Specified			
0 Places;±0.2	4 Places;±0.2		
1 Places;±0.2	Angles;		
2 Places;±0.2	Product:		
3 Places;±0.2			

Maker	Wes	Date	2023/04/25
Review		Date	
Approved		Date	

Scale:1:5:1 Unit:

Shenzhen Vinstronics Electronic Co., Ltd

Drawing Number	VST-IT-75FF50SM-01				
Description	75Ω Type F Female to 50Ω SMA Male DC~3GHz,5.7dB				
mm	RVE	A.0	Page	1 OF 1	