

Revisions			
Rev.:	Description	Data	Approved
1.0		2020.02.23	


DETAIL A
SCALE 20:1

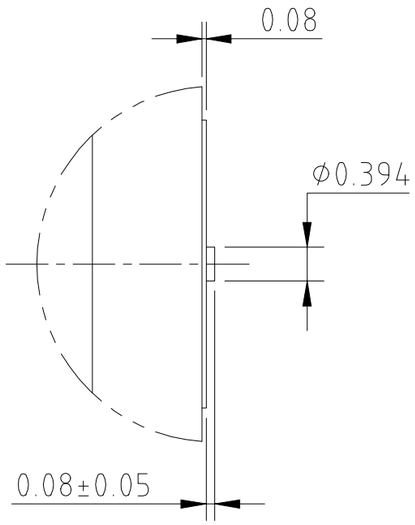


DETAIL B
SCALE 15:1

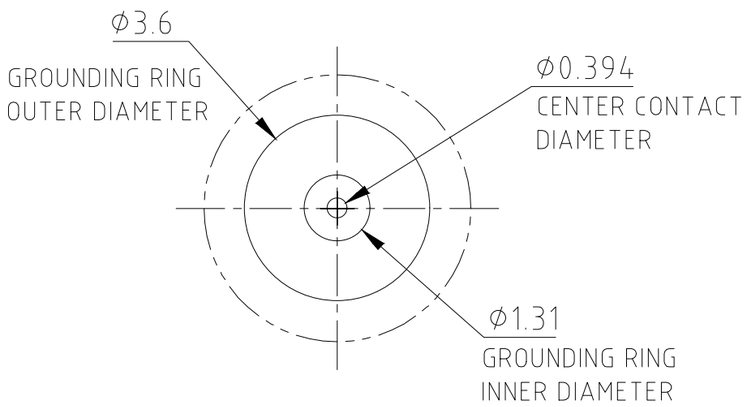

RECOMMENDED PCB LAYOUT

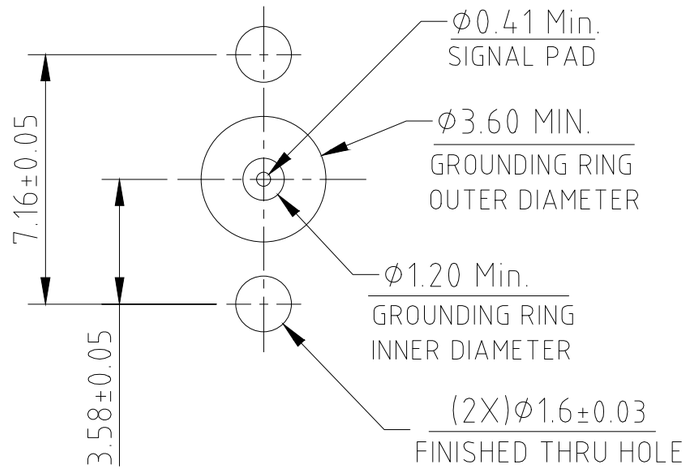

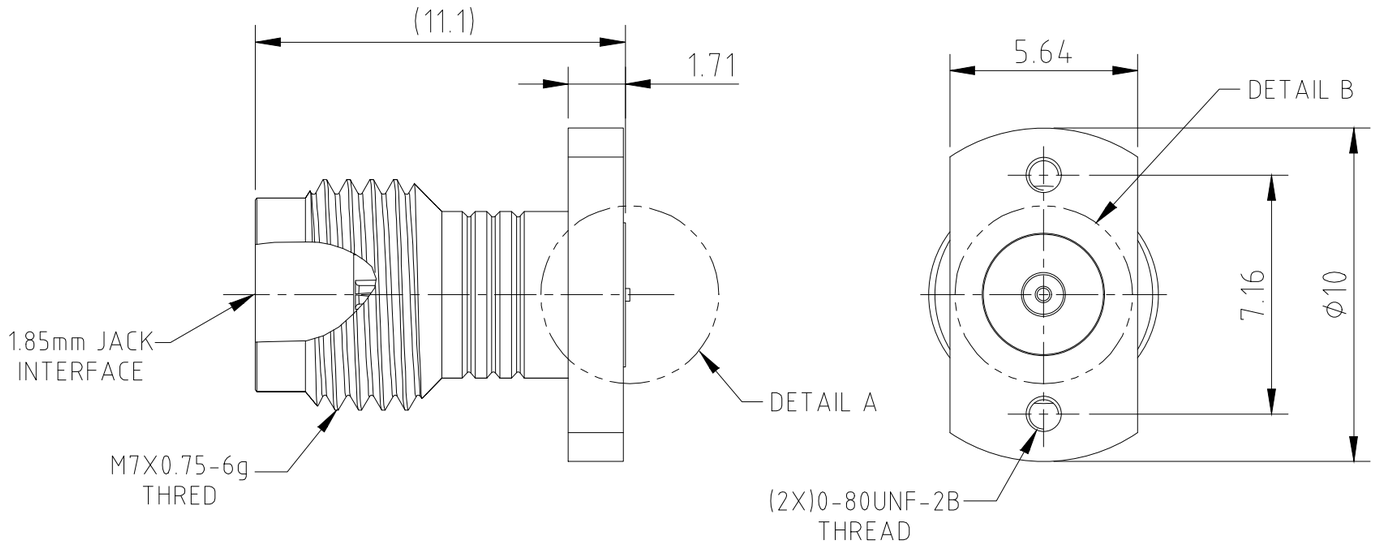

PERFORMANCE:

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC~ 67 GHZ
3. VSWR: 1.45 MAX. DC 67 GHZ
4. INSERTION LOSS: 0.05 X SQRT(F(F IN GHZ))
5. DIELECTRIC WITHSTAND VOLTAGE: 500 VRMS.
6. OPERATING TEMPERATURE: -40 C° TO +155 C°

DIELETRIC	PEI	NATURAL
CENTER CONTACT	BERYLLIUM COPPER	GOLD
BODY	STAINLESS STEEL	PASSIVATED
DESCRIPTION	MATERIAL	FINISH

General tolerance
Unless Otherwise Specified
0 Places: ±0.2
1 Places: ±0.2
2 Places: ±0.2
3 Places:
4 Places:
Angles:

VISTRONICS DRAWING
This drawing
is a controlled document

SHENZHEN VINSTRONICS CO., LTD

Name: C035	Customer P/N:		Part Number:
Units: mm	Series: /	Cable: /	Drawing Number: VST-CPM185F01
Approved	Checked	Drawn	Title: 1.85MM JACK,2 HOLE FLANGE 0-80 THREAD, 0.8~2.45MM BOARD
		Liang 2020.02.23	Scale: 1.5:1 / Page: 1/1 / Rev.: 1.0