



Revisions			
REV:	Description	Date	Approval
A.0			



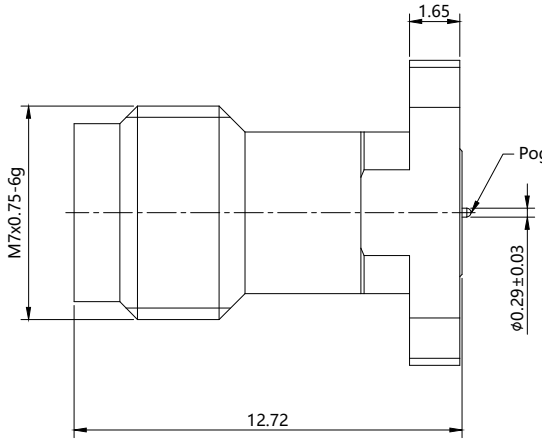


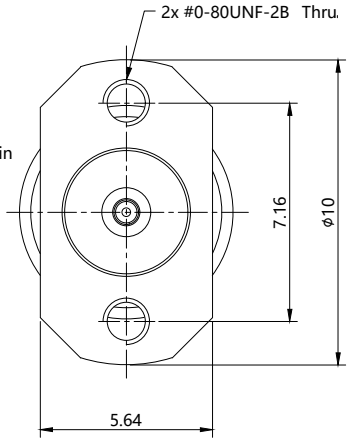

Recommended PCB Layout

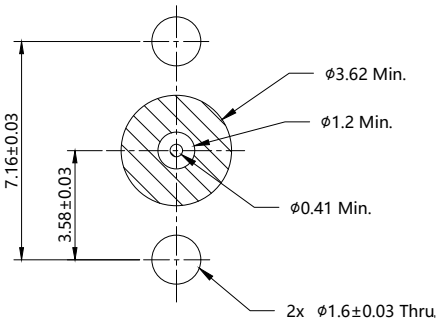

Electrical parameters:
1 Impedance: 50Ω
2 Frequency: DC~65GHz
3 VSWR: ≤1.3
4 Dielectric withstand voltage: 500Vrms
5 Insulation resistance: 5000MΩ



			General tolerance Unless Otherwise Specified		0 Places;±0.2 / 1 Places;±0.2 / 2 Places;±0.2 / 3 Places;±0.2	4 Places;±0.2 / Angles; / Product:	Shenzhen Vinstronics Electronic Co., Ltd				
Screw	Stainless steel	Passivated									
Dielectric	PEI	NA	Maker	Wang Weitao	Date	2021/06/05	Drawing Number	VST-CPM185F-04			
Outer conductor	Stainless steel	Passivated	Review		Date		description	1.85mm Female, Solderless, Straight For Microstrip			
Center conductor	Beryllium Copper	Gold	Approved		Date						
Description	Material	Plating			Scale:1:5:1	Unit:	mm	RVE	A.0	Page	1 OF 1