


Revisions			
REV:	Description	Date	Approval
A.0			


Recommended PCB Layout

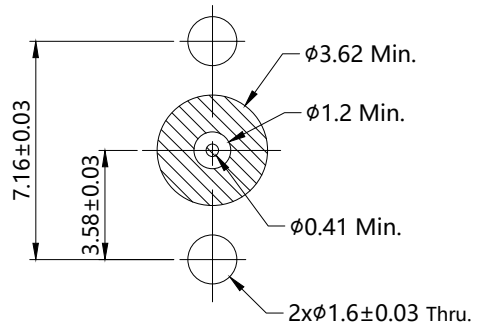

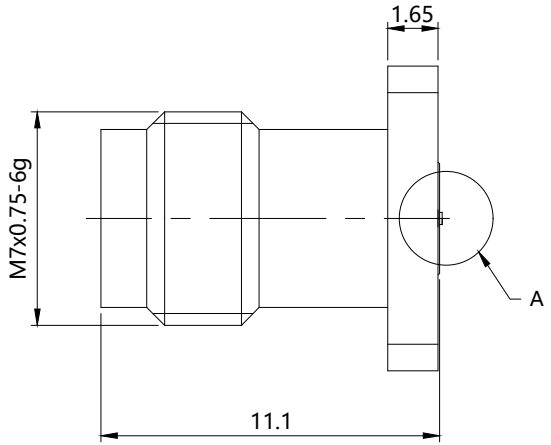

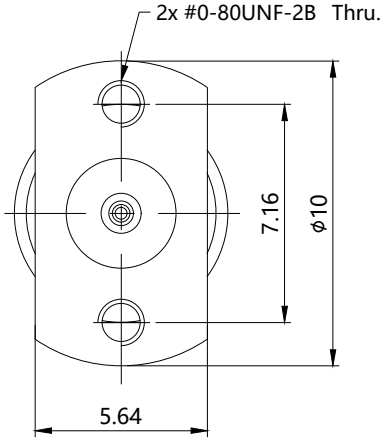

Detali A



Electrical parameters:
1.Impedance: 50Ω
2.Frequency: DC~67GHz
3.VSWR: ≤1.4
4.Dielectric withstand voltage: 500Vrms
5.Insulation resistance: 5000MΩ

			General tolerance Unless Otherwise Specified		0 Places;±0.2 / 1 Places;±0.2 / 2 Places;±0.2 / 3 Places;±0.2	4 Places;±0.2 / Angles; / Product:	Shenzhen Vinstronics Electronic Co., Ltd				
Screw	Stainless steel	Passivated									
Dielectric	PEI	NA	Maker	Wes	Date	2022/08/25	Drawing Number	VST-CPM185F-05			
Outer conductor	Stainless steel	Passivated	Review		Date		Description	1.85mm Jack, Solderless, Straight For Microstrip			
Center conductor	Beryllium Copper	Gold	Approved		Date						
Description	Material	Plating			Scale:1:5:1	Unit:	mm	RVE	A.0	Page	1 OF 1