

Revisions			
Rev.:	Description	Data	Approved
1.0		2020.11.23	


RECOMMENDED PCB LAYOUT


TOP SIDE

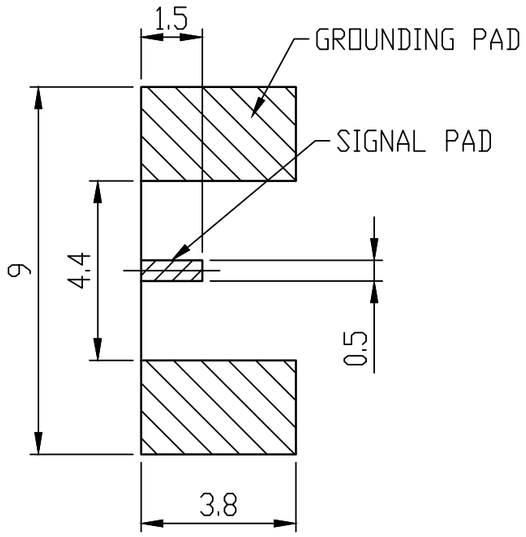



BOTTOM SIDE

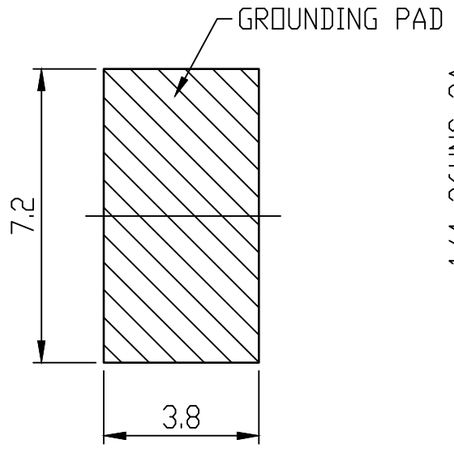

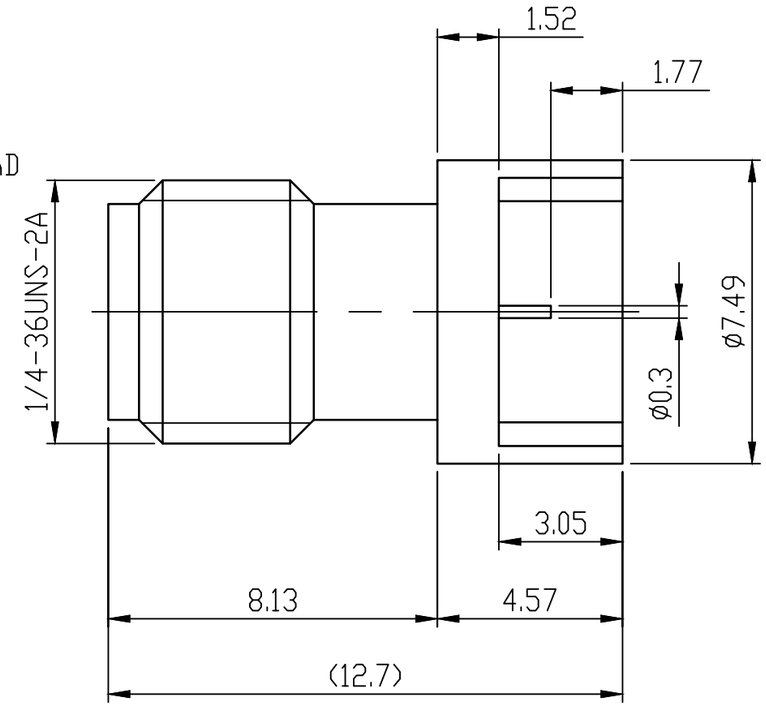

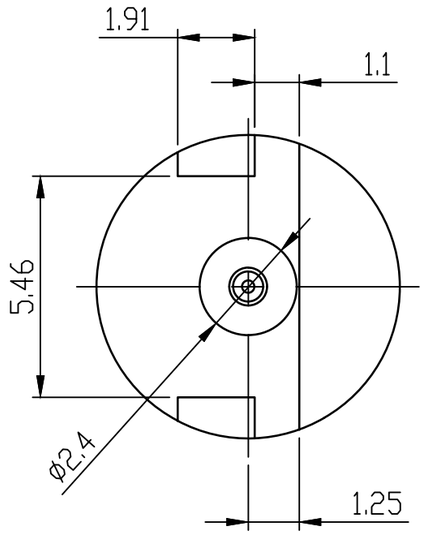





PERFORMANCE:

1. IMPEDANCE: 50 OHM
2. REQUENCY RANGE: DC~ 50 GHZ
3. VSWR: 1.3 MAX. DC~ 50 GHZ
4. INSERTION LOSS: 0.05 X SQRT(F(F IN GHZ))
5. DIELECTRIC WITHSTAND VOLTAGE: 500 VRMS.
6. OPERATING TEMPERATURE: -40 C° TO +155 C°

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	GOLD
DIELETRIC	ULTEM	NATURAL
CENTER CONTACT	BERYLLIUM COPPER	GOLD

General tolerance
Unless Otherwise Specified
0 Places: ±0.2
1 Places: ±0.2
2 Places: ±0.2
3 Places:
4 Places:
Angles:

VISTRONICS DRAWING
This drawing is a controlled document

SHENZHEN VINSTRONICS CO., LTD

Name: C016	Customer P/N:		Part Number:
Units: mm	Series: /	Cable: /	Drawing Number: VST-CP24F01
Approved	Checked	Drawn	Title: 2.4 MM JACK, PCB MOUNT Ø0.3 PIN FOR 1.57mm PCB
		Liang 2020.11.23	Scale: 1.5:1 / Page: 1/1 / Rev.: 1.0