



| Revisions | | | |
|---|---|---|---|
| REV: | Description | Date | Approval |
| A.0 | | | |

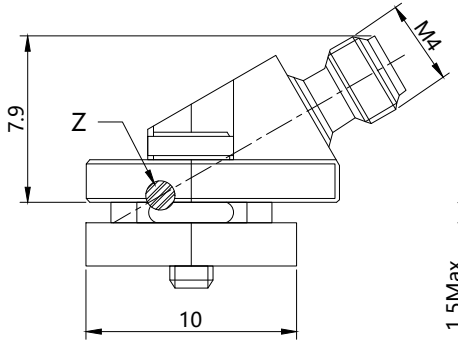

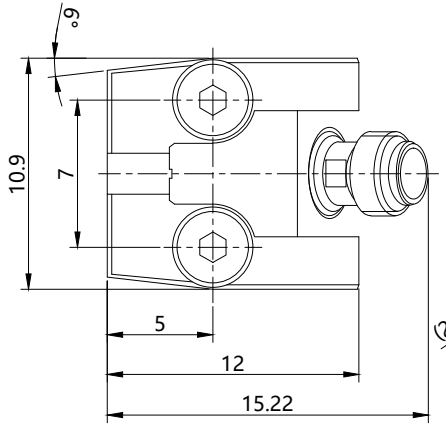


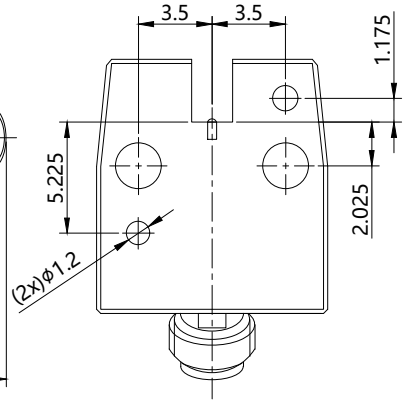

X view detail
Without screws and plate

Electrical parameters:
1 Impedance: 50Ω
2 Frequency: DC~110GHz
3 VSWR: ≤1.4
4 Dielectric withstand voltage: 1000Vrms
5 Insulation resistance: 5000MΩ

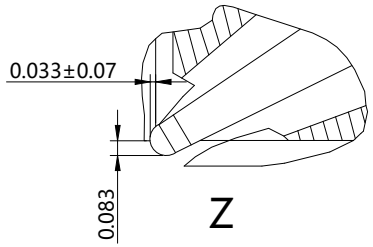


| | | | General tolerance Unless Otherwise Specified | | 0 Places;±0.2 | 4 Places;±0.2 | **Shenzhen Vinstronics Electronic Co., Ltd** | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | 1 Places;±0.2 | Angles; | | | | | |
| | | | | | 2 Places;±0.2 | Product: | | | | | |
| | | | | | 3 Places;±0.2 | | | | | | |
| Dielectric | PEI | NA | Maker | Wang Weitao | Date | 2022/010/25 | Drawing Number | VST-CPM10F-02 | | | |
| Outer conductor | Stainless steel | Passivated | Review | | Date | | description | 1.0MM JACK | | | |
| Center conductor | Beryllium Copper | Gold | Approved | | Date | | | | | | |
| Description | Material | Plating | | | Scale:1:5:1 | Unit: | mm | RVE | A.0 | Page | 1 OF 1 |