


Revisions			
REV:	Description	Date	Approval
A.0			


Recommended PCB Layout

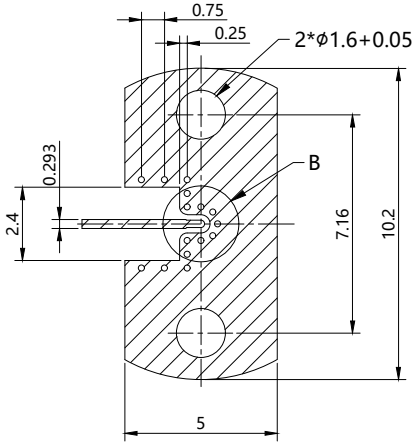



Detali B

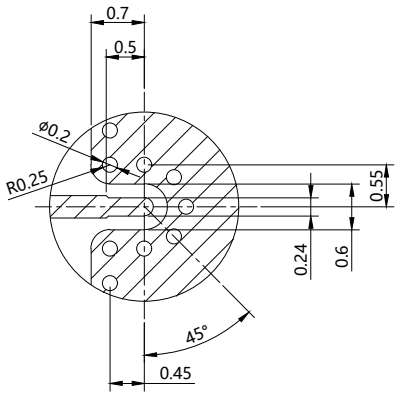

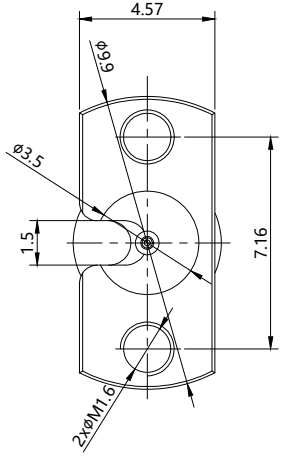


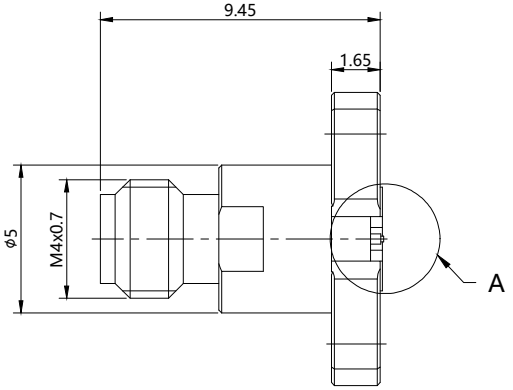





Detali A



Electrical parameters:
1 Impedance: 50Ω
2 Frequency: DC~110GHz
3 Return loss: ≥15 dB
4 Dielectric withstand voltage: 500Vrms
5 Insulation resistance: 5000MΩ

			General tolerance Unless Otherwise Specified		0 Places;±0.2 / 1 Places;±0.2 / 2 Places;±0.2 / 3 Places;±0.2	4 Places;±0.2 / Angles; / Product:	**Shenzhen Vinstronics Electronic Co., Ltd**				
Screw	Stainless steel	Passivated									
Dielectric	PEI	NA	Maker	Wang Weitao	Date	2023/04/25	Drawing Number	VST-CPM10F-05			
Outer conductor	Stainless steel	Passivated	Review		Date		description	1.0mm Female, Straight PCB Connector			
Center conductor	Beryllium Copper	Gold	Approved		Date						
Description	Material	Plating			Scale:1:5:1	Unit:	mm	RVE	A.0	Page	1 OF 1