

Revisions			
Rev.:	Description	Data	Approved
1.0		2021.02.03	

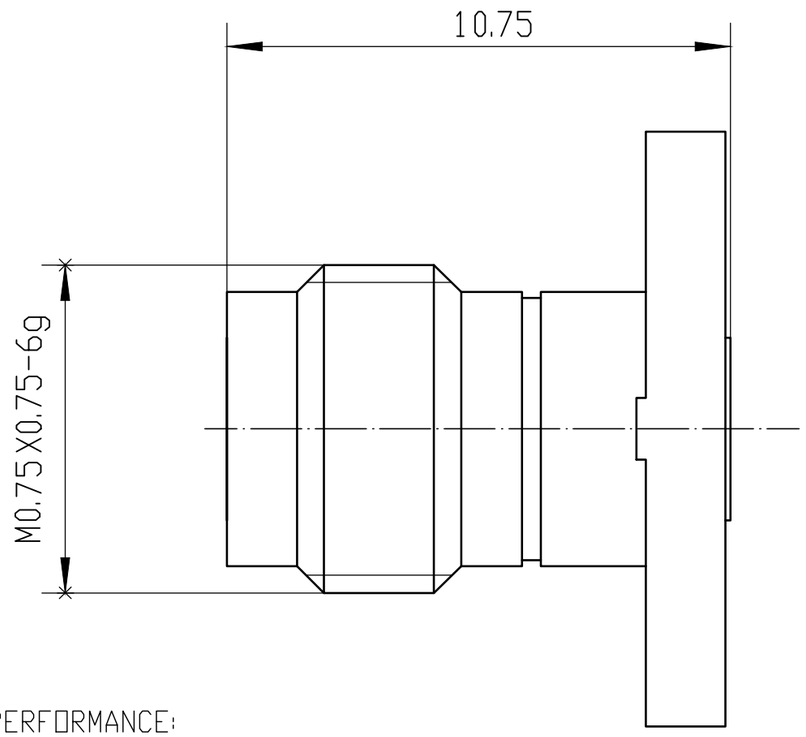

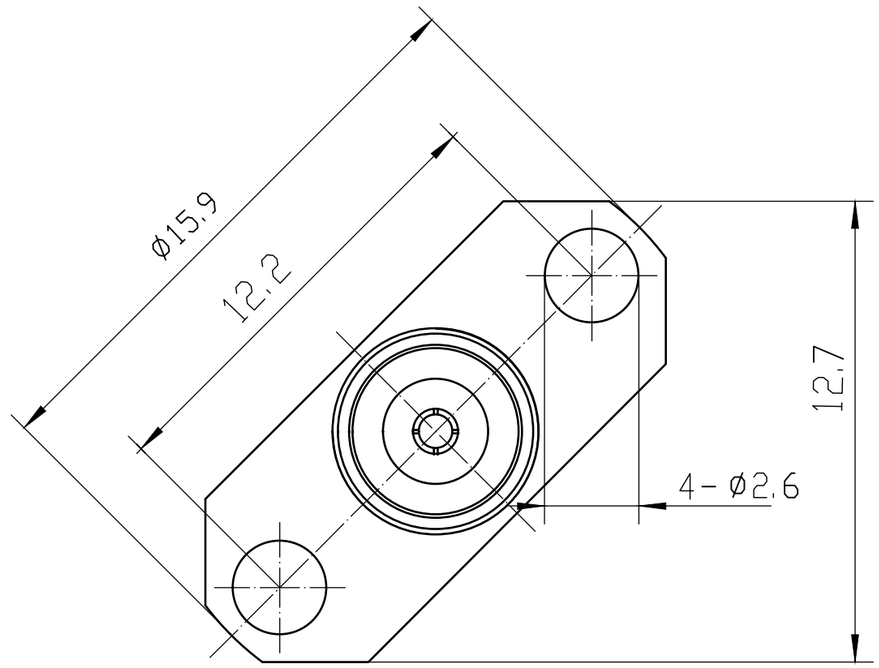

PERFORMANCE:

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC~ 50 GHZ
3. VSWR: 1.2 MAX. DC~ 50 GHZ
4. INSERTION LOSS: 0.05 X SQRT(F(F IN GHZ))
5. DIELECTRIC WITHSTAND VOLTAGE: 350 VRMS.
6. OPERATING TEMPERATURE: -40 C° TO +155 C°
7. INSULATION RESISTANCE: ≥5000 M OHM
8. MECHANICAL DURABILITY: ≥500 TIMES

DESCRIPTION	MATERIAL	FINISH
BODY	STAINLESS STEEL	PASSIVATED
DIELETRIC	PEI	NATURAL
CENTER CONTACT	BERYLLIUM COPPER	GOLD

General tolerance
Unless Otherwise Specified
0 Places: ±0.2
1 Places: ±0.2
2 Places: ±0.2
3 Places:
4 Places:
Angles:

VISTRONICS DRAWING
This drawing is a controlled document

SHENZHEN VINSTRONICS CO., LTD

Name: C031	Customer P/N:		Part Number:
Units: mm	Series: /	Cable: /	Drawing Number: VST-CPM24F03
Approved	Checked	Drawn	Title: 2.4MM JACK, SOLDERLESS 0-80 THREAD
		Liang 2021.02.03	Scale: 1.5:1 / Page: 1/1 / Rev.: 1.0