



Revisions			
REV:	Description	Date	Approval
A.0			

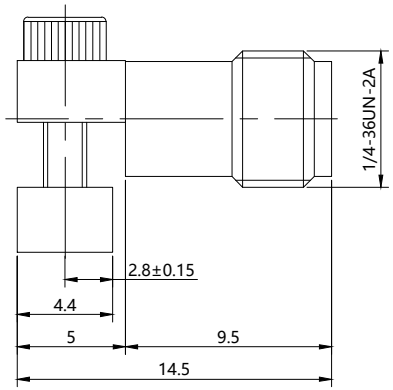


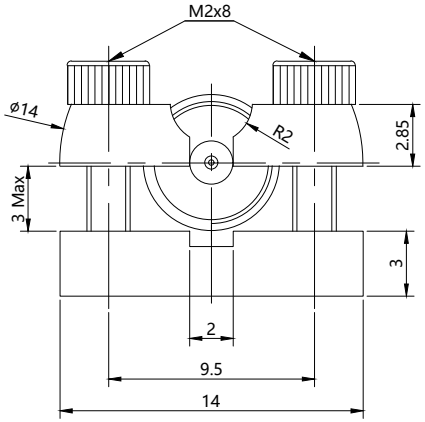

RECOMMENDED PCB LAYOUT

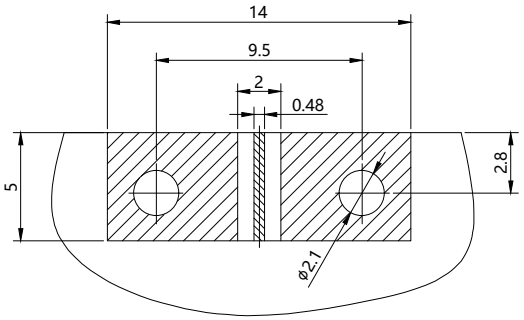

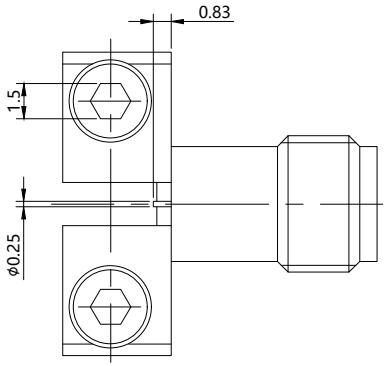



Electrical parameters:
1 Impedance: 50Ω
2 Frequency: DC~40GHz
3 VSWR: ≤1.25
4 Dielectric withstand voltage: 500Vrms
5 Insulation resistance: 5000MΩ

			General tolerance Unless Otherwise Specified		0 Places;±0.2	4 Places;±0.2	**Shenzhen Vinstronics Electronic Co., Ltd**				
					1 Places;±0.2	Angles;					
Screw	Stainless steel	Passivated			2 Places;±0.2	Product:					
					3 Places;±0.2						
Dielectric	PTFE/PEI	NA	Maker	Wang Weitao	Date	2020/11/25	Drawing Number	VST-CPM292RF-02			
Outer conductor	Brass	Gold	Review		Date		description	2.92MM Female, Right Angle For PCB			
Center conductor	Beryllium Copper	Gold	Approved		Date						
Description	Material	Plating			Scale:1:5:1	Unit:	mm	RVE	A.0	Page	1 OF 1