
Beryllium Copper Cryogenic Coaxial Cable

G08E-BeCu

0.86 mm OD BeCu cryogenic RF coaxial cable for compact lower-loss routing up to 18 GHz.

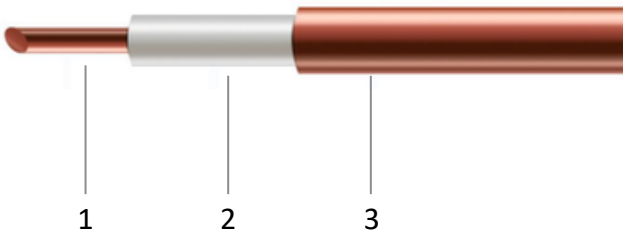

> **Product definition:** G08E-BeCu is a beryllium copper cryogenic RF coaxial cable for compact lower-loss routing where RF attenuation and thermal conduction must be evaluated together.

OUTER DIAMETER	OPERATING FREQUENCY	CABLE-LEVEL CUTOFF	MATERIAL FAMILY
0.86 mm	**18 GHz**	**154 GHz**	**BeCu**

CORE FEATURES

- 0.86 mm OD BeCu cryogenic coaxial construction
- Beryllium copper inner conductor, PTFE dielectric, beryllium copper outer conductor
- Lower-loss conductor system for compact cryogenic RF routing
- DC–18 GHz operating frequency with 154 GHz cable-level cutoff

TARGET APPLICATIONS

- Lower-loss cryogenic RF signal paths
- Quantum device readout and measurement lines
- Low-temperature microwave test interconnects
- Compact RF paths where attenuation control is required

CONSTRUCTION SPECIFICATION

NO.	COMPONENT	MATERIAL & PROCESS	DIAMETER MM [IN]
1	Inner Conductor	Beryllium copper	**0.230 [0.009]**
2	Dielectric	PTFE	**0.640 [0.025]**
3	Outer Conductor	Beryllium copper	**0.860 [0.034]**

ELECTRICAL PROPERTIES

Parameter	Value
Operating Frequency	**18 GHz**
Cable-Level Cutoff Frequency	**154 GHz**
Characteristic Impedance	**50 ± 3 Ω**
Shielding Effectiveness	**>165 dB**
Dielectric Withstand Voltage	**700 V DC**
Velocity of Propagation	**77%**

MECHANICAL & ENVIRONMENTAL

Parameter	Value
Min. Bending Radius, Static	**1.60 mm**
Weight	**0.003 kg/m**
Temperature Range	**-268°C to 150°C**

CABLE ATTENUATION

CONDITION	500 MHZ	1000 MHZ	5000 MHZ	10000 MHZ	18000 MHZ
Attenuation @300K (dB/m)	2.6	3.7	8.3	11.9	16.0
Attenuation @4K (dB/m)	1.8	2.5	5.6	7.9	10.7

Interpolation reference: A = K1 × √F(MHz) + K2 × F(MHz). Tabulated attenuation values are shown in dB/m. K1 = 0.115607, K2 = 0.000030.

CRYOGENIC DESIGN NOTE

Thermal conductivity is used for preliminary heat-load estimation only. Final cable assembly performance depends on cable length, connector interfaces, thermal anchoring, routing geometry, and operating temperature stages.

4K THERMAL CONDUCTIVITY

51 $\times 10^{-6}$ W·cm/K

Typical design data for preliminary thermal-load estimation; not a final assembly guarantee.

DESIGN NOTES AND DATA BOUNDARY

Operating frequency	18 GHz is the operating frequency rating for preliminary cable selection.
Cable-level cutoff	154 GHz is a cable-level construction parameter; final assembly operating frequency may be limited by connector interface and configuration.
Thermal data	4K thermal conductivity is typical design data for preliminary heat-load estimation.
Final assembly	Connector interface, cable length, routing form, and thermal anchoring may affect final performance.

CONFIGURATION INFORMATION REQUIRED FOR CABLE ASSEMBLY QUOTE

CABLE MODEL	**ASSEMBLY LENGTH**	**CONNECTOR INTERFACE**	**QUANTITY**
ROUTING FORM	**TEMPERATURE STAGE**	**MAGNETIC / NON-MAGNETIC REQUIREMENT**	**SPECIAL NOTES**