



Revisions			
REV:	Description	Date	Approval
A.0			

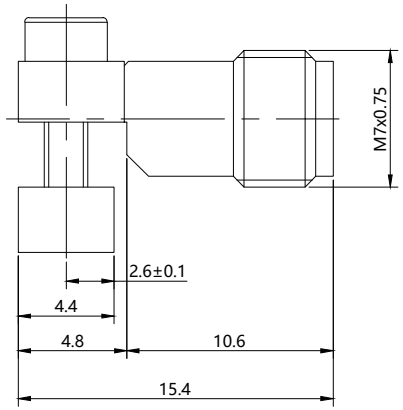


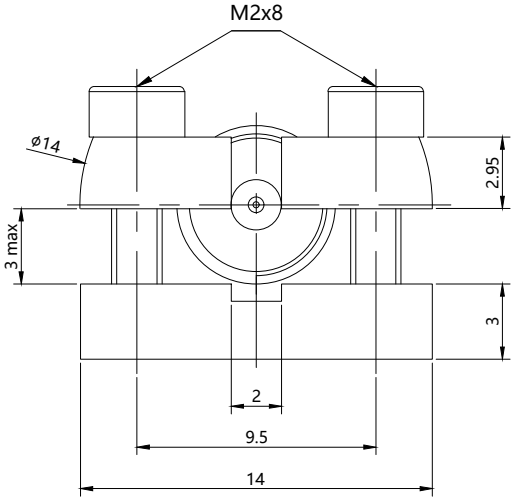

RECOMMENDED PCB LAYOUT

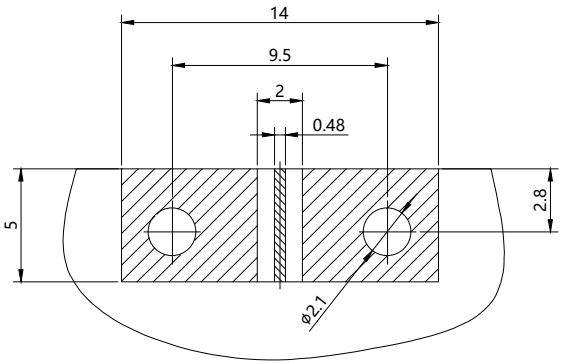

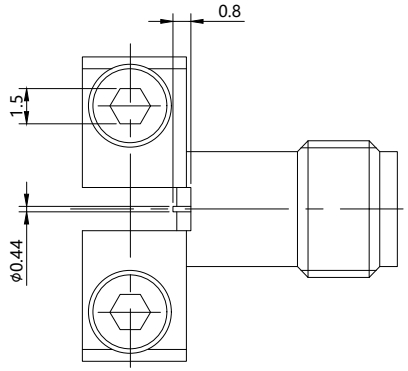

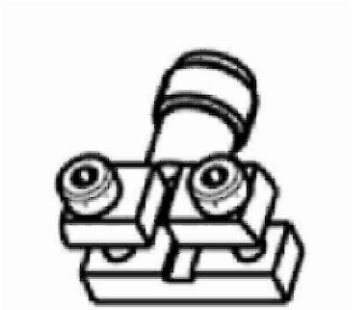

Electrical parameters:
1 Impedance: 50Ω
2 Frequency: DC~26.5GHz
3 VSWR: ≤1.25
4 Dielectric withstand voltage: 500Vrms
5 Insulation resistance: 5000MΩ

			General tolerance Unless Otherwise Specified		0 Places;±0.2 / 1 Places;±0.2 / 2 Places;±0.2 / 3 Places;±0.2	4 Places;±0.2 / Angles; / Product:	**Shenzhen Vinstronics Electronic Co., Ltd**				
Screw	Stainless steel	Passivated									
Dielectric	PTFE/PEI	NA	Maker	Wang Weitao	Date	2020/11/25	Drawing Number	**VST-CPM185RF-01**			
Outer conductor	Brass	Gold	Review		Date		description	1.85MM Female, Right Angle For PCB			
Center conductor	Beryllium Copper	Gold	Approved		Date						
Description	Material	Plating			Scale:1:5:1	Unit:	mm	RVE	A.0	Page	1 OF 1