



Revisions			
REV:	Description	Date	Approval
A.0			


Recommended PCB Layout

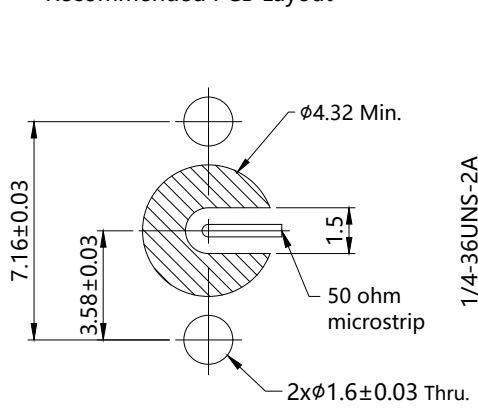

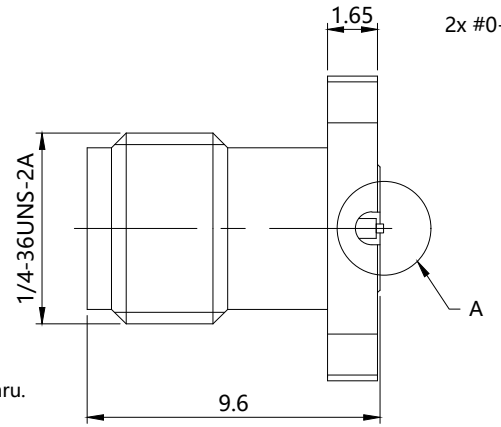

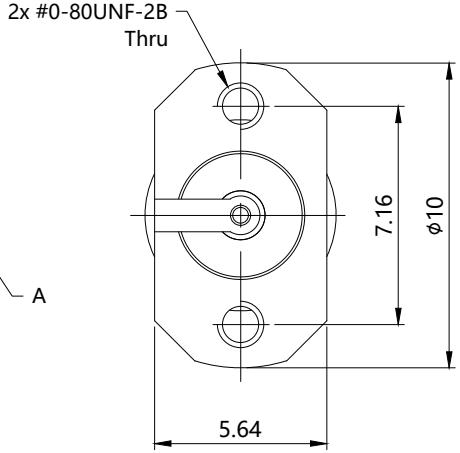






Electrical parameters:

1.Impedance: 50Ω
2.Frequency: DC~40GHz
3.VSWR: ≤1.25
4.Dielectric withstand voltage: 500Vrms
5.Insulation resistance: 5000MΩ



			General tolerance Unless Otherwise Specified		0 Places;±0.2 / 1 Places;±0.2 / 2 Places;±0.2 / 3 Places;±0.2	4 Places;±0.2 / Angles; / Product:	**Shenzhen Vinstronics Electronic Co., Ltd**				
Screw	Stainless steel	Passivated									
Dielectric	PEI	NA	Maker	Wes	Date	2022/08/25	Drawing Number	VST-CPM292F-10			
Outer conductor	Stainless steel	Passivated	Review		Date		Description	2.92mm Jack, For PCB Compression, With Slot			
Center conductor	Beryllium Copper	Gold	Approved		Date						
Description	Material	Plating		Scale:1:5:1	Unit:		mm	RVE	A.0	Page	1 OF 1