



Revisions			
Rev.:	Description	Data	Approved
1.0		2020.11.23	


RECOMMENDED PCB LAYOUT

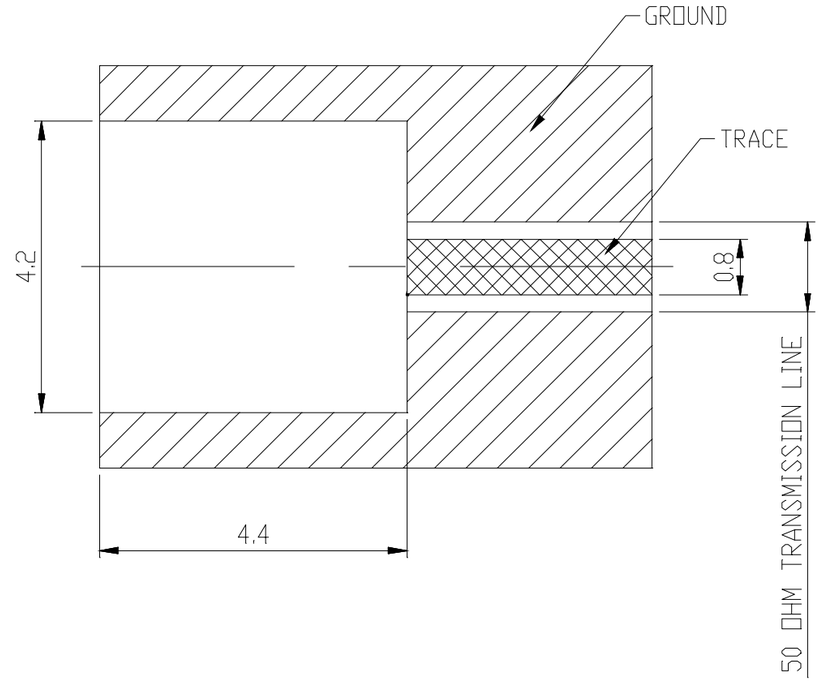

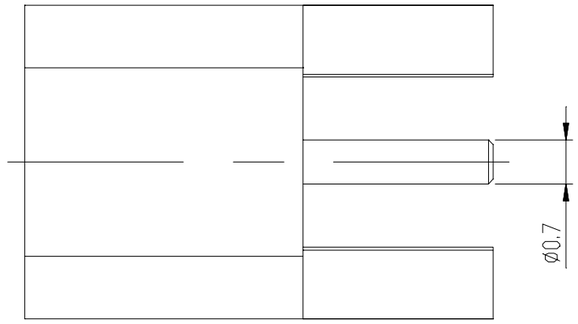



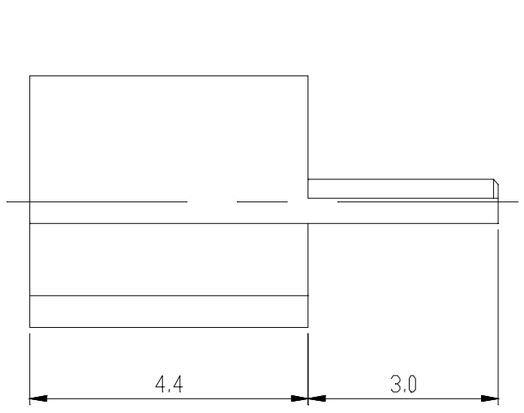

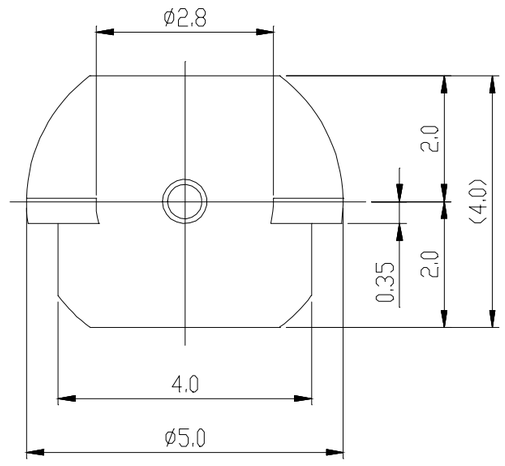

PERFORMANCE:

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC~ 40 GHZ
3. VSWR: 1.4 MAX. @ DC~ 40 GHZ
4. INSERTION LOSS: 0.1 X SQRT(F(F IN GHZ))
5. DIELECTRIC WITHSTAND VOLTAGE: 500 VRMS.
6. OPERATING TEMPERATURE: -40 C° TO +155 C°

DESCRIPTION	MATERIAL	FINISH
CENTER CONTACT	BRASS	GOLD
DIELETRIC	PTFE	NATURAL
BODY	BRASS	GOLD

General tolerance
Unless Otherwise Specified
0 Places: ±0.1
1 Places: ±0.05
2 Places: ±0.03
3 Places:
4 Places:
Angles:

VISTRONICS DRAWING
This drawing
is a controlled document

SHENZHEN VINSTRONICS CO., LTD

Name: C024	Customer P/N:		Part Number:
Units: mm	Series: /	Cable: /	Drawing Number: VST-CPSMPM01
Approved	Checked	Drawn	Title: SMP PLUG, PCB EDGE MOUNT
		Liang 2020.11.23	Scale: 1.5:1 / Page: 1/1 / Rev.: 1.0