
Revisions			
REV:	Description	Date	Approval
A.0			

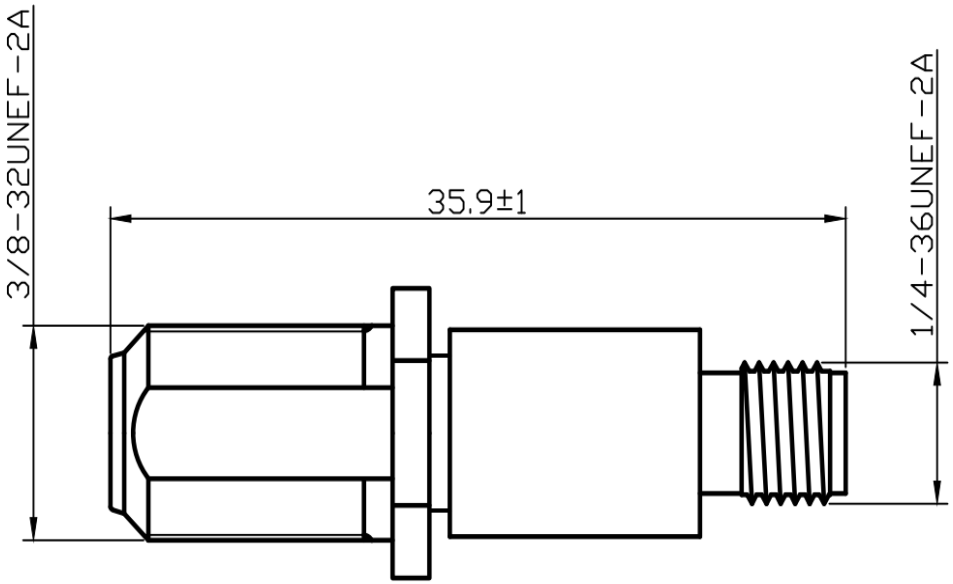

Electrical parameters:
1.Impedance: 50Ω
2.Frequency: DC~3GHz
3.VSWR: ≤1.25
4.Attenuation: 5.7+0.5dB
5.Input Power: 2Watts Avg @ +25℃
6.Temperature Range: -40~+125℃
7.Durability: 500 Cycle Min.
8.All materials are RoHS compliance

No.	Description	Material	Plating
SMA	Center conductor	Beryllium Copper	Gold
	Insulator	PTFE	NA
	Housings	Stainless steel	Passivated
	Body	Stainless steel	Passivated
F	Center conductor	Beryllium Copper	Gold
	Insulator	PTFE	NA
	Housings	Stainless steel	Passivated
	Body	Brass	Nickel

General tolerance Unless Otherwise Specified		0 Places;±0.2	4 Places;±0.2	**Shenzhen Vinstronics Electronic Co., Ltd**	
		1 Places;±0.2	Angles;		
		2 Places;±0.2	Product:		
		3 Places;±0.2			
Maker	Wes	Date	2023/04/25	Drawing Number	VST-IT-50SF75FF-01
Review		Date		Description	50Ω SMA Female to 75Ω F **Female** DC~3GHz,5.7dB
Approved		Date			
		Scale:1:5:1	Unit:	mm RVE A.0	Page 1 OF 1