
Revisions			
REV:	Description	Date	Approval
A.0			

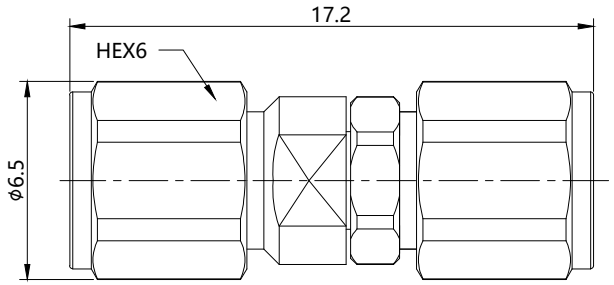

1. Electricals data
   1.1 Impedance: 50 Ω
   1.2 Frequency range: DC to 110 GHz
   1.3 VSWR: ≤ 1.4
   1.4 Insertion loss: ≤ 0.06 X sqrt(F(F in GHz))
   1.5 Dielectric withstand voltage: 500 Vrms
   1.6 Working voltage: 150 Vrms
2. Mechanical data
   2.1 Mechanical life: ≥ 500 cycles
   2.2 Recommended torque: 0.3 N.m to 0.41 N.m
3. Environment data
   3.1 working temperature: -55 ℃ to +125 ℃
   3.2 RoHS: Compliant

			General tolerance Unless Otherwise Specified		0 Places;±0.2 / 1 Places;±0.2 / 2 Places;±0.2 / 3 Places;±0.2	4 Places;±0.2 / Angles; / Product:	**Shenzhen Vinstronics Electronic Co., Ltd**				
Dielectric	PEI	NA	Maker	Wes	Date	2022/04/25	Drawing Number	**VST-A-10M10M-02**			
Outer conductor	Stainless steel	Passivated	Review		Date		Description	1.0mm Male TO 1.0mm Male			
Center conductor	Beryllium Copper	Gold	Approved		Date						
Description	Material	Plating		Scale:1:5:1	Unit:		mm	RVE	A.0	Page	1 OF 1