
Revisions			
Rev.:	Description	Data	Approved
1.0		2020.12.02	

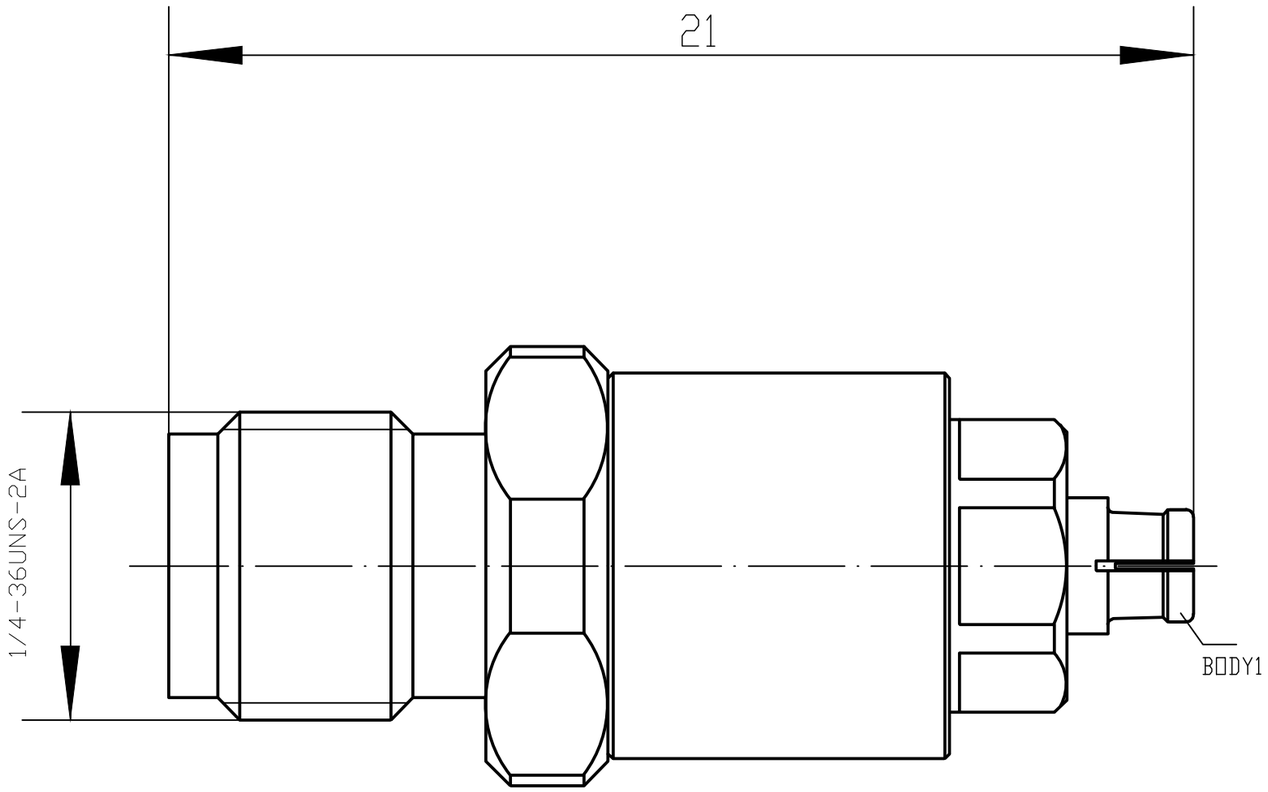

PERFORMANCE:

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC~ 40 GHZ
3. VSWR: 1.2 MAX. DC~ 40 GHZ
4. INSERTION LOSS: 0.05 X SQRT(F(F IN GHZ))
5. DIELECTRIC WITHSTAND VOLTAGE: 350 VRMS.
6. OPERATING TEMPERATURE: -40 C° TO +155 C°
7. MECHANICAL DURABILITY: ⩾500 TIMES
8. SHIELDING EFFICIENCY: ⩾ 75 dB (1 GHZ)

DESCRIPTION	MATERIAL	FINISH
BODY1	BERYLLIUM COPPER	GOLD
BODY	STAINLESS STEEL	PASSIVATED
DIELETRIC	PEI	NATURAL
CENTER CONTACT	BERYLLIUM COPPER	GOLD

General tolerance
Unless Otherwise Specified
0 Places: ±0.2
1 Places: ±0.2
2 Places: ±0.2
3 Places:
4 Places:
Angles:

VISTRONICS DRAWING
This drawing is a controlled document

SHENZHEN VINSTRONICS CO., LTD

Name:	Customer P/N:		Part Number:
Units: mm	Series: /	Cable: /	Drawing Number: VST-A-292FSSMPF01
Approved	Checked	Drawn	Title: 2.92 JACK TO SSMP JACK
		Liang 2020.12.02	Scale: 4:1 / Page: 1/1 / Rev.: 1.0