
| Revisions | | | |
|---|---|---|---|
| Rev.: | Description | Data | Approved |
| 1.0 | | 2020.12.02 | |

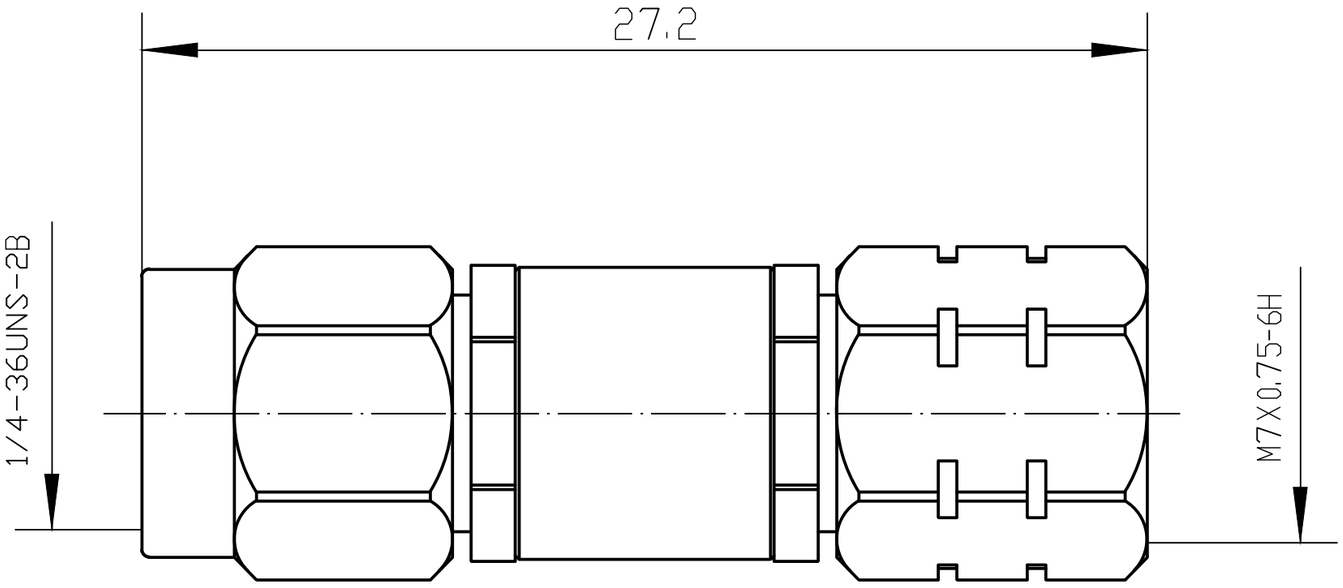


PERFORMANCE:

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC~26.5 GHZ
3. VSWR: 1.10 MAX. DC~26.5 GHZ
4. INSERTION LOSS: 0.05 X SQRT(F(F IN GHZ))
5. DIELECTRIC WITHSTAND VOLTAGE: 350 VRMS.
6. OPERATING TEMPERATURE: -40 C° TO +155 C°
7. MECHANICAL DURABILITY: ≥500 TIMES
8. SHIELDING EFFICIENCY: ≥ 90 dB (1 GHZ)

| DESCRIPTION | MATERIAL | FINISH |
|---|---|---|
| BODY | STAINLESS STEEL | PASSIVATED |
| DIELETRIC | PEI | NATURAL |
| CENTER CONTACT | BERYLLIUM COPPER | GOLD |

General tolerance
Unless Otherwise Specified
0 Places: ±0.2
1 Places: ±0.2
2 Places: ±0.2
3 Places:
4 Places:
Angles:

VISTRONICS DRAWING
This drawing is a controlled document

# SHENZHEN VINSTRONICS CO., LTD

| Name: | Customer P/N: | | Part Number: |
|---|---|---|---|
| Units: mm | Series: / | Cable: / | Drawing Number: VST-A-35M185M01 |
| Approved | Checked | Drawn | Title: 3.5 MM PLUG TO 1.85 MM PLUG |
| | | Liang 2020.12.02 | Scale: 4:1 / Page: 1/1 / Rev.: 1.0 |