


| Revisions | | | |
|---|---|---|---|
| REV: | Description | Date | Approval |
| A.0 | | | |

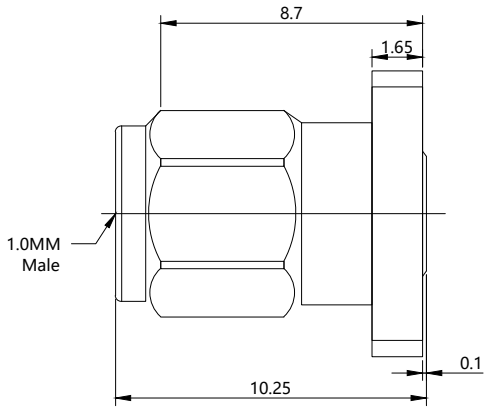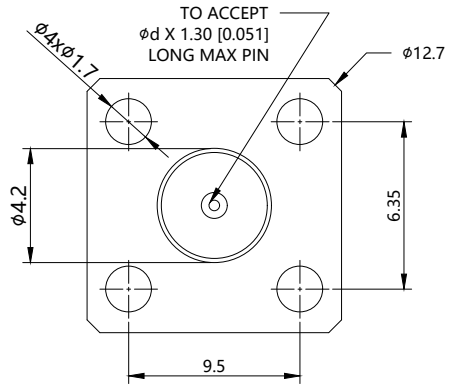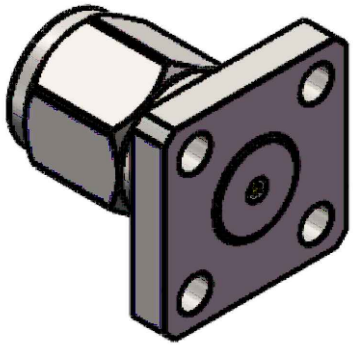

Electrical parameters:
1 Impedance: 50Ω
2 Frequency: DC~110GHz
3 VSWR: ≤1.4
4 Dielectric withstand voltage: 1000Vrms
5 Insulation resistance: 5000MΩ

| | | | General tolerance Unless Otherwise Specified | | 0 Places;±0.2 / 1 Places;±0.2 / 2 Places;±0.2 / 3 Places;±0.2 | 4 Places;±0.2 / Angles; / Product: | **Shenzhen Vinstronics Electronic Co., Ltd** | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Dielectric | PEI | NA | Maker | Wang Weitao | Date | 2021/08/01 | Drawing Number | VST-CPM10MF4-01X | | | |
| Outer conductor | Stainless steel | Passivated | Review | | Date | | description | 1.0mm male connector 4 Hole panel mount | | | |
| Center conductor | Beryllium Copper | Gold | Approved | | Date | | | | | | |
| Description | Material | Plating | | Scale:1:5:1 | Unit: | | mm | RVE | A.0 | Page | 1 OF 1 |