

Revisions			
Rev:	Description	Date	Approval
A.0			

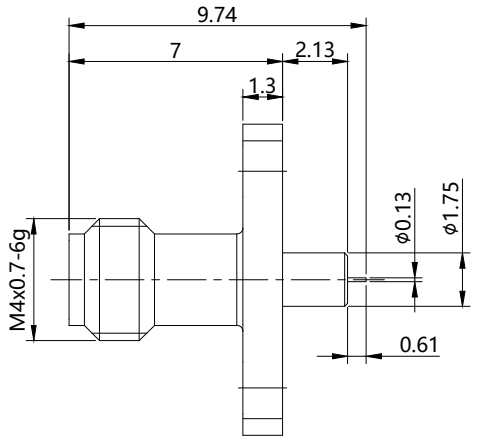

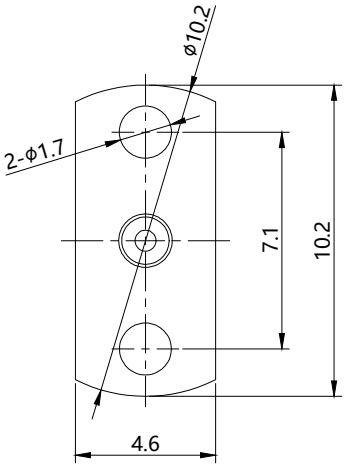

Electrical parameters:
1.Impedance: 50Ω
2.Frequency: DC~110GHz
3.VSWR: ≤1.5
4.Insertion loss: ≤ 0.05 X sqrt(F(F in GHz)) dB
5.Dielectric withstand voltage: 500Vrms
6.Working voltage: 335 Vrms
7.Mechanical life: ≥ 500 cycles
8.Working temperature: -55 ℃ to +155 ℃
9.RoHS: Compliant

			General tolerance Unless Otherwise Specified		0 Places;±0.2 / 1 Places;±0.2 / 2 Places;±0.2 / 3 Places;±0.2	4 Places;±0.2 / Angles; / Product:	**Shenzhen Vinstronics Electronic Co., Ltd**				
Dielectric	PEI	NA	Maker	Wes	Date	2023/04/25	Drawing Number	**VST-CP10FF2-01**			
Outer conductor	Stainless steel	Passivated	Review		Date		Description	1.0mm Female For PCB			
Center conductor	Beryllium Copper	Gold	Approved		Date						
Description	Material	Plating			Scale:1:5:1	Unit:	mm	Rev	A.0	Page	1 OF 1