



Revisions			
Rev:	Description	Date	Approval
A.0			

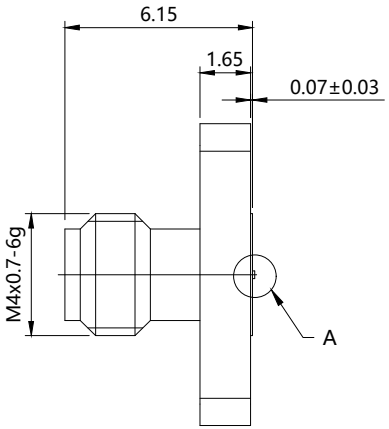

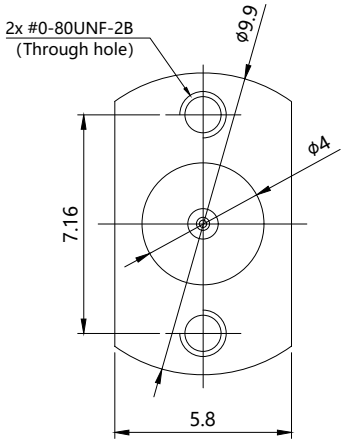


Recommended PCB Layout

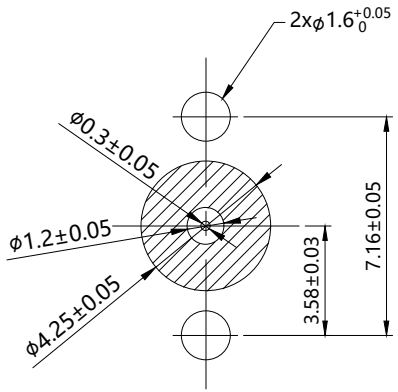



2 pcs Screw
(Separate packing)

A Detailed diagram.



Electrical parameters:
1.Impedance: 50Ω
2.Frequency: DC~110GHz
3.VSWR: ≤1.45
4.Dielectric withstand voltage: 500Vrms
5.Insulation resistance: 5000MΩ

			General tolerance Unless Otherwise Specified		0 Places;±0.2 / 1 Places;±0.2 / 2 Places;±0.2 / 3 Places;±0.2	4 Places;±0.2 / Angles; / Product:	**Shenzhen Vinstronics Electronic Co., Ltd**				
Screw	Stainless steel	Passivated									
Dielectric	PEI	NA	Maker	Wes	Date	2021/06/25	Drawing Number	VST-CPM10F-08			
Outer conductor	Stainless steel	Passivated	Review		Date		Description	1.0mm Female, Straight PCB Connector			
Center conductor	Beryllium Copper	Gold	Approved		Date						
Description	Material	Plating			Scale:1:5:1	Unit:	mm	Rev	A.0	Page	1 OF 1