
Size	5 ~ 10	11 ~ 50	51 ~ 150	151 ~ 500	501 ~ 1200	1201 ~ 1800	1801 ~ 2500	2501 ~ 5000	5001 ~ 20000
Tolerance	±1	±2	±3	±5	±10	±15	±20	±30	±50

Revisions			
Rev:	Description	Date	Approval
A.0			

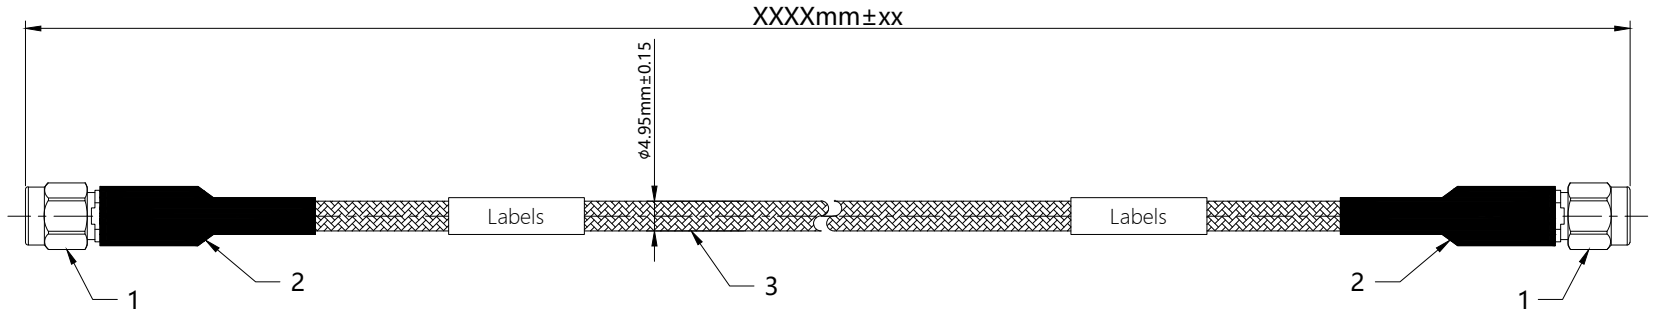

Performance:
1.Impedance: 50Ω
2.Frequency range: DC~ 40 GHz
3.VSWR: ≤1.25 MAX.DC~ 40 GHz
4.Insertion loss: see test report
5.Dielectric withstand voltage: 1000 VRMS
6.Operating temperature: -55℃~+125℃
7.Insulation resistance: ≥5000 MΩ
8.Bending radius: ≥25 MM
9.Shielding efficiency: ≥90DB(1GHz)
10.Mechanical durability: ≥500 TIMES
11.Phase matching for pair ±1ps

No	Item	Description	Qty	Remarks
5				
4				
3	Cable	VXT260KB	1PCS	
2	Heat-shrink tubing	BLACK	2PCS	
1	Connector	2.92mm-M	2PCS	

General tolerance
Unless Otherwise Specified

0 Places;±0.2	4 Places;±0.2		
1 Places;±0.2	Angles;		
2 Places;±0.2	Product:		
3 Places;±0.2	VXT260KB		

Maker	Wes	Date	2022/04/24
Review		Date	
Approved		Date	

Scale:1:5:1 Unit:

Shenzhen Vinstronics Electronic Co., Ltd

Drawing Number	VST-L-292M292M-T26KB-XXXX
Description	2.92mm Male TO 2.92mm Male T26KB XXXXMM

mm	Rev	A.0	Page	1 OF 1