RF COAXIAL TERMINATION

2.4 mm Male RF Terminator

DC–50 GHz | 50 Ω | 1 W

P/N VST-F-24M0101-50G

PRODUCT OVERVIEW

A fixed 50 Ω coaxial termination with a 2.4 mm male interface, specified for operation from DC to 50 GHz.



KEY FEATURES

- Broadband 50 Ω port termination with VSWR ≤1.35:1 through 50 GHz
- 1 W rated power in a compact 2.4 mm coaxial design
- Passivated stainless-steel construction with gold-plated brass RF contact

APPLICATIONS

- Termination of unused RF/mmWave ports
- RF component and interconnect testing
- Broadband coaxial measurement fixtures

ELECTRICAL SPECIFICATIONS

PARAMETER	SPECIFICATION
Frequency Range	**DC–50 GHz**
Nominal Impedance	**50 Ω**
VSWR (Max.)	**≤1.35:1 (DC–50 GHz)**
Rated Power	**1 W**
Temperature Range	**–55 °C to +125 °C**
Connector Interface	**2.4 mm Male**


RF COAXIAL TERMINATION

Mechanical & Material Details

2.4 mm Male RF Terminator / VST-F-24M0101-50G

MECHANICAL OUTLINE

Dimensions in mm

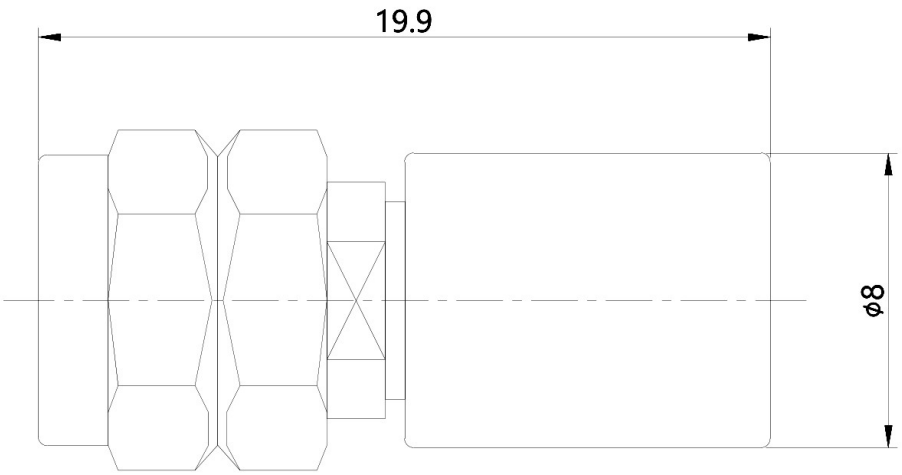

MECHANICAL DATA	SPECIFICATION
Overall Length	**19.9 mm**
Body Diameter	**Ø8 mm**
Weight	**5 g**

MATERIALS & FINISH	SPECIFICATION
Body	**Stainless steel, passivated**
Internal Contact	**Brass, gold plated**
Outer Conductor	**Stainless steel, passivated**
Insulator	**PTFE**

ORDERING INFORMATION VST-F-24M0101-50G

2.4 mm Male RF Terminator