RF COAXIAL TERMINATION

2.92 mm Male RF Terminator

DC–40 GHz | 50 Ω | 2 W

P/N VST-F-292M0201-40G

PRODUCT OVERVIEW

A fixed 50 Ω coaxial termination with a 2.92 mm male interface, specified for operation from DC to 40 GHz.



KEY FEATURES

- Broadband 50 Ω port termination with VSWR ≤1.30:1 through 40 GHz
- 2 W rated power in a compact 12 mm coaxial design
- Passivated stainless-steel construction with gold-plated brass RF contact

APPLICATIONS

- Termination of unused RF/mmWave ports
- RF component and interconnect testing
- Broadband coaxial measurement fixtures

ELECTRICAL SPECIFICATIONS

PARAMETER	SPECIFICATION
Frequency Range	**DC–40 GHz**
Nominal Impedance	**50 Ω**
VSWR (Max.)	**≤1.30:1 (DC–40 GHz)**
Rated Power	**2 W**
Temperature Range	**–55 °C to +125 °C**
Connector Interface	**2.92 mm Male**


RF COAXIAL TERMINATION

Mechanical & Material Details

2.92 mm Male RF Terminator / VST-F-292M0201-40G

MECHANICAL OUTLINE

Dimensions in mm

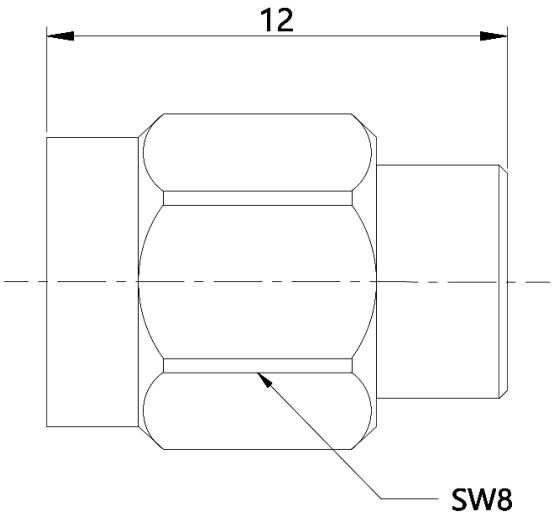

MECHANICAL DATA	SPECIFICATION
Overall Length	**12 mm**
Wrench Flats	**8 mm**

MATERIALS & FINISH	SPECIFICATION
Body	**Stainless steel, passivated**
Internal Contact	**Brass, gold plated**
Outer Conductor	**Stainless steel, passivated**
Insulator	**PEI**

ORDERING INFORMATION VST-F-292M0201-40G

2.92 mm Male RF Terminator